




**Water & Dust  
Resistant**



**Flight  
Mode**

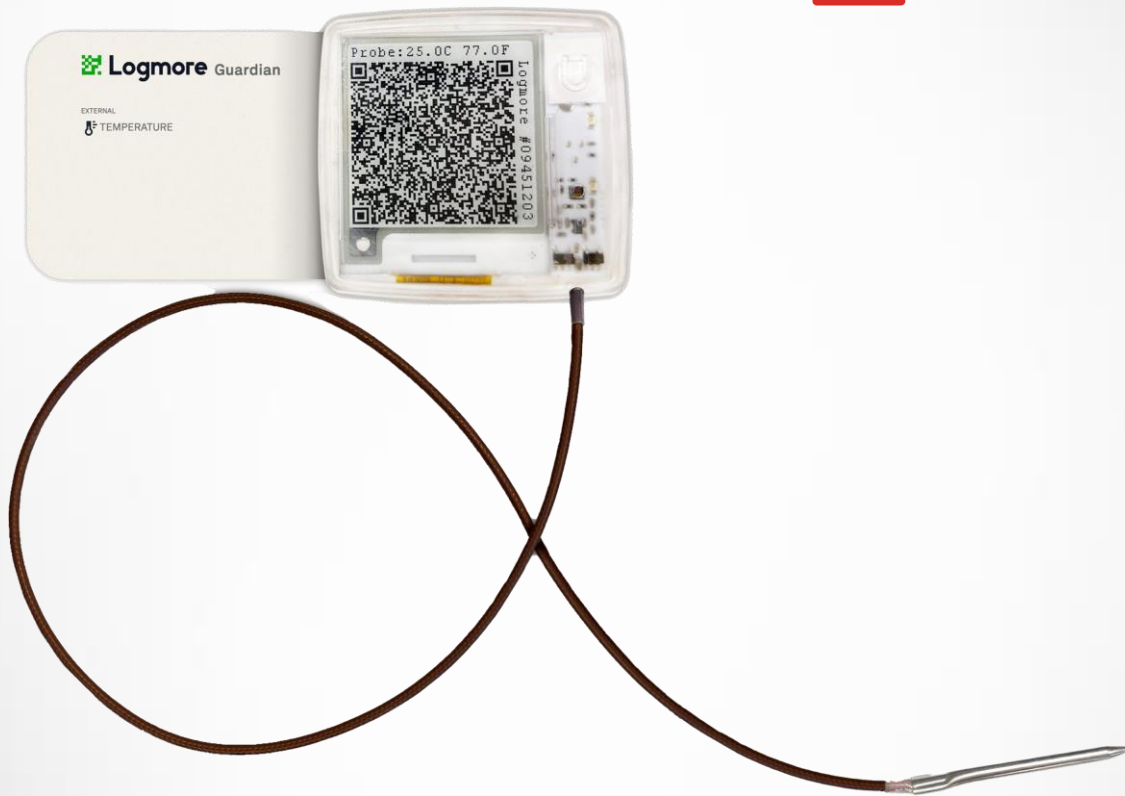

**Simple  
Mounting**



**3** years  
measurement  
interval –  
**15** minutes

# Logger X

## Sensors

### Temperature

Operating range: - 30 °C to 60 °C, - 103 °C to 118 °C  
with external probe

Accuracy:  $\pm 0,5$  °C (at full range acc to ISO/IEC 17025)

## Battery

135 mAh CR2320 non-rechargeable lithium coin cell battery

Up to 20.000 measurements in total – 2.000 per QR-code depending on the settings

Lasts 3 years on 15-minute measurement interval (modifiable)

## Transmission Type

Non-transmitting, depends on the QR-code reading device

Smartphone reading, laser scanner

## Mounting

Simple free mounting due to self-adhesive backside

## Dimensions

47,9 x 45,4 x 6,1 mm

## Weight

15 g

## IP Rating

67

## Certifications & Approvals

CE, FCC, NIST traceable, GDP & 21 CFR part 11 compliant, IATA DGR compliant